

ELEKHEAT

**2025 PRODUCT CATALOGUE -
Coffee Machine Heating Elements**



ELEKHEAT



Coffee Machine Heating Elements

Heating Elements for Coffee Machine 3-18



Underwriters Laboratories



Heating Elements for Coffee Machine

Animo



fig.	GEV No.	P (W)	volt. (V)	HC	L (mm)	W (mm)	H (mm)	tube ø (mm)	ø (mm)	flange (mm)	TS ø (mm)	LTS (mm)	TS	HD (mm)	Ref. No.
1	EKH-417315	3200	230	1	137	122	26	6.3					3/4"		03022
2	EKH-417310	6000	230	3	285	37	33	8.5			9	270	1½"		03118

Astoria



fig.	GEV No.	P (W)	volt. (V)	HC	L (mm)	W (mm)	H (mm)	tube ø (mm)	ø (mm)	flange (mm)	TS ø (mm)	LTS (mm)	TS	HD (mm)	Ref. No.
1	EKH-417006	1300	230	1	110	27	30	6.4					1¼"		17201
2	EKH-417090	1450	230	1	132	36	40	6.3						74	—
3	EKH-417579	1700	230	2	175	35	54	8			7	140		74	17003
4	EKH-417039	2000	230	2	185	30	50	8						74	17006




fig.	GEV No.	P (W)	volt. (V)	HC	L (mm)	W (mm)	H (mm)	tube ø (mm)	ø (mm)	flange (mm)	TS ø (mm)	LTS (mm)	TS	HD (mm)	Ref. No.
5	EKH-417107	2600	230	2	295	36	41	8.5			6	186		74	17051
6	EKH-417233	3000	230	3	315	30	45	8			6	150		74	17058
7	EKH-417000	3400	230	3	305	35	38	8.3			6	155		74	17059
8	EKH-417088	3700	230	3	570	35	46	8.5			6	160		74	17104




fig.	GEV No.	P (W)	volt. (V)	HC	L (mm)	W (mm)	H (mm)	tube ø (mm)	ø (mm)	flange (mm)	TS ø (mm)	LTS (mm)	TS	HD (mm)	Ref. No.
9	EKH-417580	5000	230	2	570	32	44	8.5			1	160		74	17106
10	EKH-419174	4000/4355	230/240	3	315	38	45	8.5			6	157		75	17057

Aurora



fig.	GEV No.	P (W)	volt. (V)	HC	L (mm)	W (mm)	H (mm)	tube ø (mm)	ø (mm)	flange (mm)	TS ø (mm)	LTS (mm)	TS	HD (mm)	Ref. No.
1	EKH-417263	3000	230/400	3	305	33	33	8			5	148		58	000645.F

Bartscher


fig.	GEV No.	P (W)	volt. (V)	HC	L (mm)	W (mm)	H (mm)	tube ø (mm)	ø (mm)	flange (mm)	TS ø (mm)	LTS (mm)	TS	HD (mm)	Ref. No.
1	EKH-420147			1			42	6.5							A0ND010
2	EKH-420146	130	230	1	130	130	54		130						A0ND012

Bezzera


fig.	GEV No.	P (W)	volt. (V)	HC	L (mm)	W (mm)	H (mm)	tube ø (mm)	ø (mm)	flange (mm)	TS ø (mm)	LTS (mm)	TS	HD (mm)	Ref. No.
1	EKH-417168	1300	240	1	47	-	-	8.5	67					44	5722239TP
2	EKH-417050	2000	230	2	165	34	52	8.5			6.5	142		40	—
3	EKH-417051	2750/3300	220/240	2	338	28	57	8.5			6	160		39	5722242

BFC


fig.	GEV No.	P (W)	volt. (V)	HC	L (mm)	W (mm)	H (mm)	tube ø (mm)	ø (mm)	flange (mm)	TS ø (mm)	LTS (mm)	TS	HD (mm)	Ref. No.
1	EKH-417277	1300	220	1	97	26	26	6.5					1¼"		5050009
2	EKH-417273	2400	230	2	210	35	27	8.3			7	195		74	5050710
3	EKH-417275	2500	230	2	285	35	24	8.3			7	160	1¼"		5050205

Bianchi Vending


fig.	GEV No.	P (W)	volt. (V)	HC	L (mm)	W (mm)	H (mm)	tube ø (mm)	ø (mm)	flange (mm)	TS ø (mm)	LTS (mm)	TS	HD (mm)	Ref. No.
1	EKH-417048	2400	230	2	235	34	24	8.4					1¼"		29006911

Bianchi Vending



fig.	GEV No.	P (W)	volt. (V)	HC	L (mm)	W (mm)	H (mm)	tube ø (mm)	ø (mm)	flange (mm)	TS ø (mm)	LTS (mm)	TS	HD (mm)	Ref. No.
1	EKH-417048	2400	230	2	235	34	24	8.4						1 1/4"	29006911

Bonamat

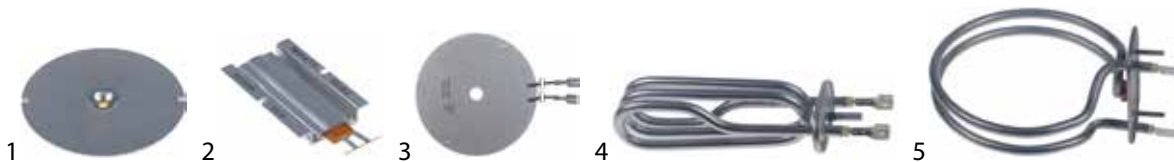


fig.	GEV No.	P (W)	volt. (V)	HC	L (mm)	W (mm)	H (mm)	tube ø (mm)	ø (mm)	flange (mm)	TS ø (mm)	LTS (mm)	TS	HD (mm)	Ref. No.
1	EKH-417486		100-240				8		95						6.284.129.000
2	EKH-417324		100-240		75	54	11							42	6.401.076.000
2	EKH-417424	65	100-240	1	75	48	11							42	6.240.147.000
2	EKH-417423	90	100-240	1	75	48	11							42	6.242.206.000
3	EKH-417427	60	230		-	-	1		100						6.240.029.000
4	EKH-417408	1200	240	1	115	28	35	6.4		50x26					6.236.158.000
5	EKH-417481	1590	240	1	125	125	55	6.4							6.284.028.000



fig.	GEV No.	P (W)	volt. (V)	HC	L (mm)	W (mm)	H (mm)	tube ø (mm)	ø (mm)	flange (mm)	TS ø (mm)	LTS (mm)	TS	HD (mm)	Ref. No.
6	EKH-417478	2270	240	1	155	122	24	6.4		46x22					6.000.262.014

Brasilia



fig.	GEV No.	P (W)	volt. (V)	HC	L (mm)	W (mm)	H (mm)	tube ø (mm)	ø (mm)	flange (mm)	TS ø (mm)	LTS (mm)	TS	HD (mm)	Ref. No.
1	EKH-417280	1000	220	1			60	6.3	50				M10x1		10432.2.00.08
2	EKH-417035	1200	230	1			66	8.5	55				1/4"		00625.2.00.08
3	EKH-417081	1350	230	1	140	22	23	8.5					1"		01911.2.00.08
4	EKH-417030	1800	230	2	177	26	53	8.5						57	00614.2.00.08
5	EKH-417032	2000	230	1	170	35	33	8.5							00613.2.00.08

fig.	GEV No.	P (W)	volt. (V)	HC	L (mm)	W (mm)	H (mm)	tube ø (mm)	ø (mm)	flange (mm)	TS ø (mm)	LTS (mm)	TS	HD (mm)	Ref. No.
6	EKH-417080	2400	220	1	225	24	38	8					1½"		01378
7	EKH-417031	3000	230	2	327	28	52	8.5						59	00615.2.00.08
7	EKH-417095	3500	230	2	330	34	53	8.3						57	01834.2.00.08
7	EKH-417446	4000	230	2	342	26	51	8						57	00616.2.00.08

Bremer

fig.	GEV No.	P (W)	volt. (V)	HC	L (mm)	W (mm)	H (mm)	tube ø (mm)	ø (mm)	flange (mm)	TS ø (mm)	LTS (mm)	TS	HD (mm)	Ref. No.
1	EKH-415439	2000	230	1	342	33	26	8.5					M12x1		378577
1	EKH-415437	3000	220	1	350	33	32	8.6					M12x1		378585
2	EKH-415440	3300	220	1	255	67	20	8.5					M12x1		372749

Brugnetti

fig.	GEV No.	P (W)	volt. (V)	HC	L (mm)	W (mm)	H (mm)	tube ø (mm)	ø (mm)	flange (mm)	TS ø (mm)	LTS (mm)	TS	HD (mm)	Ref. No.
1	EKH-417263	3000	230/400	3	305	33	33	8			5	148		58	000645.F

Camurri

fig.	GEV No.	P (W)	volt. (V)	HC	L (mm)	W (mm)	H (mm)	tube ø (mm)	ø (mm)	flange (mm)	TS ø (mm)	LTS (mm)	TS	HD (mm)	Ref. No.
1	EKH-417509	900	230	1	130	44	42	8		26X61					050N0070
2	EKH-417510	1500	230	1				6.3	168		7	110	1"		050N0020

Carimali

fig.	GEV No.	P (W)	volt. (V)	HC	L (mm)	W (mm)	H (mm)	tube ø (mm)	ø (mm)	flange (mm)	TS ø (mm)	LTS (mm)	TS	HD (mm)	Ref. No.
1	EKH-417452	1600	230	1	160	32	23	8			6.6	140	1¼"		—
2	EKH-417045	1800	230	1	135	36	39	8.5					1¼"		—
3	EKH-417046	2000	230	1	200	32	26	8.5			6.5	152	1¼"		95.00985
4	EKH-417048	2400	230	2	235	34	24	8.4					1¼"		—

fig.	GEV No.	P (W)	volt. (V)	HC	L (mm)	W (mm)	H (mm)	tube ø (mm)	ø (mm)	flange (mm)	TS ø (mm)	LTS (mm)	TS	HD (mm)	Ref. No.
5	EKH-417616	2800	230	3	153	30	30	6			4	140		58	96.00559
6	EKH-417047	3000	230	3	405	29	29	8.5			6.5	195	1¼"		95.01348.10
7	EKH-417617	4500	230	3	265	30	30	6			4	140		58	96.00561

CoffeeQueen

fig.	GEV No.	P (W)	volt. (V)	HC	L (mm)	W (mm)	H (mm)	tube ø (mm)	ø (mm)	flange (mm)	TS ø (mm)	LTS (mm)	TS	HD (mm)	Ref. No.
1	EKH-417444	95	230	1				6.4							160101
2	EKH-417503	2200	230	1			240	6.5	56				M10x1.5		1601311

Conti

fig.	GEV No.	P (W)	volt. (V)	HC	L (mm)	W (mm)	H (mm)	tube ø (mm)	ø (mm)	flange (mm)	TS ø (mm)	LTS (mm)	TS	HD (mm)	Ref. No.
1	EKH-417100	2800	230	3	245	43	71	8.3						66	—

Cookmax

fig.	GEV No.	P (W)	volt. (V)	HC	L (mm)	W (mm)	H (mm)	tube ø (mm)	ø (mm)	flange (mm)	TS ø (mm)	LTS (mm)	TS	HD (mm)	Ref. No.
1	EKH-417456	70	230	1	128	38	2								11624
2	EKH-417455	90	240				12		99						11533
3	EKH-417458	200	230		500	160	15	6.4							—
4	EKH-417453	1000	220	1			62	6	55				M10x1		098645
5	EKH-417459	1300	230	1	107	26	26						1¼"		—
6	EKH-417006	1300	230	1	110	27	30	6.4					1¼"		WY17201

heating elements




fig.	GEV No.	P (W)	volt. (V)	HC	L (mm)	W (mm)	H (mm)	tube ø (mm)	ø (mm)	flange (mm)	TS ø (mm)	LTS (mm)	TS	HD (mm)	Ref. No.
7	EKH-417454	2000	230	1			63	8.5	93	50x26					15633
8	EKH-417000	3400	230	3	305	35	38	8.3			6	155		74	WY17059

Elektra




fig.	GEV No.	P (W)	volt. (V)	HC	L (mm)	W (mm)	H (mm)	tube ø (mm)	ø (mm)	flange (mm)	TS ø (mm)	LTS (mm)	TS	HD (mm)	Ref. No.
1	EKH-417175	800	220	1			41	6.3	50				1/4"		01192035
2	EKH-417155	3000	230	3	315	32	45	8						74	00127035

Eloma




fig.	GEV No.	P (W)	volt. (V)	HC	L (mm)	W (mm)	H (mm)	tube ø (mm)	ø (mm)	flange (mm)	TS ø (mm)	LTS (mm)	TS	HD (mm)	Ref. No.
1	EKH-415439	2000	230	1	342	33	26	8.5					M12x1		ELE318039

Expobar

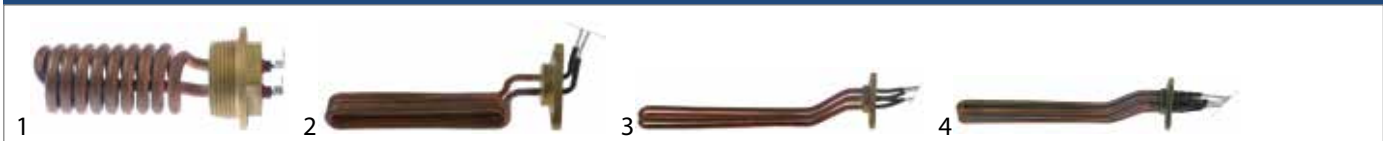


fig.	GEV No.	P (W)	volt. (V)	HC	L (mm)	W (mm)	H (mm)	tube ø (mm)	ø (mm)	flange (mm)	TS ø (mm)	LTS (mm)	TS	HD (mm)	Ref. No.
1	EKH-417528	2000	230	1	108			6.5	38				1/4"		38020001
2	EKH-417075	2500	240	1	205	26	48	6						57	38025001
3	EKH-417286	3050	230	2	335	34	55	8						57	38027000
4	EKH-417267	4500	230	3	320	32	52	8.4						57	38045000

Faema

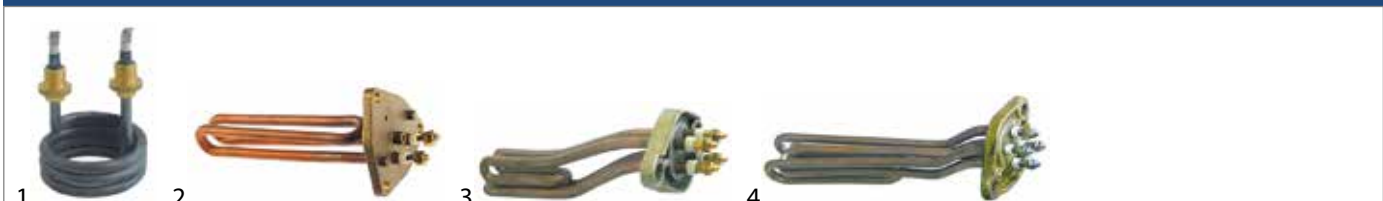


fig.	GEV No.	P (W)	volt. (V)	HC	L (mm)	W (mm)	H (mm)	tube ø (mm)	ø (mm)	flange (mm)	TS ø (mm)	LTS (mm)	TS	HD (mm)	Ref. No.
1	EKH-417113	1000	230	1			59	6.3	57				M12x1.25		—
2	EKH-417083	1500	220	1	165	25	71	8						61	3541118963
3	EKH-417002	1500	230	2	140	25	58	8						74	—
4	EKH-417116	1800	230	2	240	36	44	8.5			6	205		74	—

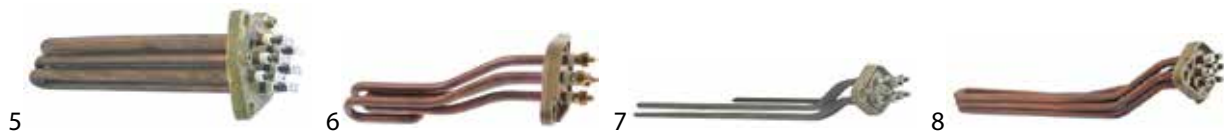


fig.	GEV No.	P (W)	volt. (V)	HC	L (mm)	W (mm)	H (mm)	tube ø (mm)	ø (mm)	flange (mm)	TS ø (mm)	LTS (mm)	TS	HD (mm)	Ref. No.
5	EKH-417011	1800	230	3	170	34	35	8.5			7	170		59	421601010
6	EKH-417004	2400	230	2	175	27	58	8.5						74	3541116635
7	EKH-417001	2600	230	2	330	30	60	8.5			7	195		74	3541133003
8	EKH-417108	3500	230	2	380	30	50	8.5			7	190		74	—
8	EKH-417202	4000	230	3	295	34	63	8.5			6.5	199		74	911544010
8	EKH-417112	4500	230	3	390	35	70	8			6.5	200		74	3541-135 078




fig.	GEV No.	P (W)	volt. (V)	HC	L (mm)	W (mm)	H (mm)	tube ø (mm)	ø (mm)	flange (mm)	TS ø (mm)	LTS (mm)	TS	HD (mm)	Ref. No.
9	EKH-417109	3700	230	2	445	26	54	8			7	208		74	3541133004
10	EKH-417110	5000	230	2	525	26	45	8.5			7	210		74	3581130091
11	EKH-417581	2440/2900	220/240	2	295	28	50	8.5			7	208		74	3541134417
12	EKH-417582	3360/4000	220/240	2	415	30	46	8.5			7	200		74	3541-134418




fig.	GEV No.	P (W)	volt. (V)	HC	L (mm)	W (mm)	H (mm)	tube ø (mm)	ø (mm)	flange (mm)	TS ø (mm)	LTS (mm)	TS	HD (mm)	Ref. No.
13	EKH-417584	5040/6000	220/240	2	620	25	55	8.5			7	210		74	3541-134419
14	EKH-417583	4500/5360	220/240	3	392	32	65	8.5			7	150		74	911545010
15	EKH-417585	5400/6400	220/240	3	605	34	75	8.5			5.5	150		74	927597010

Fiamma




fig.	GEV No.	P (W)	volt. (V)	HC	L (mm)	W (mm)	H (mm)	tube ø (mm)	ø (mm)	flange (mm)	TS ø (mm)	LTS (mm)	TS	HD (mm)	Ref. No.
1	EKH-417466	1800	230	1	155	21	22	8.3					1"		4.0.000.0218
2	EKH-417467	1800	230	2	178	28	46	8.3						57	4.0.000.0214
3	EKH-417469	3500	230	2	330	34	55	8.5						57	5.0.000.0802

Fiorenzato-C.S.




fig.	GEV No.	P (W)	volt. (V)	HC	L (mm)	W (mm)	H (mm)	tube ø (mm)	ø (mm)	flange (mm)	TS ø (mm)	LTS (mm)	TS	HD (mm)	Ref. No.
1	EKH-417354	2700	230	3	160	34	45	8.3			7	140		74	A2100146
2	EKH-417353	3500	230/400	3	295	34	45	8.3			7	210		74	A2100031
3	EKH-417352	4000	230/400	3	545	34	45	8.3			7	210		74	A2100120

Fiorenzato-C.S.


fig.	GEV No.	P (W)	volt. (V)	HC	L (mm)	W (mm)	H (mm)	tube ø (mm)	ø (mm)	flange (mm)	TS ø (mm)	LTS (mm)	TS	HD (mm)	Ref. No.
1	EKH-417354	2700	230	3	160	34	45	8.3			7	140		74	A2100146
2	EKH-417353	3500	230/400	3	295	34	45	8.3			7	210		74	A2100031
3	EKH-417352	4000	230/400	3	545	34	45	8.3			7	210		74	A2100120

Futurmat


fig.	GEV No.	P (W)	volt. (V)	HC	L (mm)	W (mm)	H (mm)	tube ø (mm)	ø (mm)	flange (mm)	TS ø (mm)	LTS (mm)	TS	HD (mm)	Ref. No.
1	EKH-417116	1800	230	2	240	36	44	8.5			6	205		74	—
2	EKH-417001	2600	230	2	330	30	60	8.5			7	195		74	02212439
3	EKH-417108	3500	230	2	380	30	50	8.5			7	190		74	08148002
4	EKH-417109	3700	230	2	445	26	54	8			7	208		74	02212538



fig.	GEV No.	P (W)	volt. (V)	HC	L (mm)	W (mm)	H (mm)	tube ø (mm)	ø (mm)	flange (mm)	TS ø (mm)	LTS (mm)	TS	HD (mm)	Ref. No.
5	EKH-417110	5000	230	2	525	26	45	8.5			7	210		74	02212637

Gaggia


fig.	GEV No.	P (W)	volt. (V)	HC	L (mm)	W (mm)	H (mm)	tube ø (mm)	ø (mm)	flange (mm)	TS ø (mm)	LTS (mm)	TS	HD (mm)	Ref. No.
1	EKH-417057	1500	230	2	145	23	37	8					1¼"	—	—
2	EKH-417022	2000	220	3	228	36	34	8.5						52	—
3	EKH-417019	2000	230	3	139	30	30	8.5						43	—
4	EKH-417020	4000	230	3	350	32	30	8						43	—



fig.	GEV No.	P (W)	volt. (V)	HC	L (mm)	W (mm)	H (mm)	tube ø (mm)	ø (mm)	flange (mm)	TS ø (mm)	LTS (mm)	TS	HD (mm)	Ref. No.
5	EKH-417110	5000	230	2	525	26	45	8.5			7	210		74	02212637
6	EKH-526625	4370/4760	220/240	3	315	33	33	8			6.5	140		51	11003362
6	EKH-526624	5000/5950	220/240	3	405	33	33	8			7	140		51	11003363

Grimac



fig.	GEV No.	P (W)	volt. (V)	HC	L (mm)	W (mm)	H (mm)	tube ø (mm)	ø (mm)	flange (mm)	TS ø (mm)	LTS (mm)	TS	HD (mm)	Ref. No.
1	EKH-417006	1300	230	1	110	27	30	6.4					1 1/4"		1240100216
2	EKH-417014	1300	230	1	185	40	18	8.5						59	C405
3	EKH-417002	1500	230	2	140	25	58	8						74	F351
4	EKH-417057	1500	230	2	145	23	37	8					1 1/4"		A080




fig.	GEV No.	P (W)	volt. (V)	HC	L (mm)	W (mm)	H (mm)	tube ø (mm)	ø (mm)	flange (mm)	TS ø (mm)	LTS (mm)	TS	HD (mm)	Ref. No.
5	EKH-417011	1800	230	3	170	34	35	8.5			7	170		59	C181
6	EKH-417185	2000	230	1	183	28	38	8			5	145		58	SM488
7	EKH-417046	2000	230	1	200	32	26	8.5			6.5	152	1 1/4"		CA064
8	EKH-417019	2000	230	3	139	30	30	8.5						43	G185



fig.	GEV No.	P (W)	volt. (V)	HC	L (mm)	W (mm)	H (mm)	tube ø (mm)	ø (mm)	flange (mm)	TS ø (mm)	LTS (mm)	TS	HD (mm)	Ref. No.
9	EKH-417004	2400	230	2	175	27	58	8.5						74	F382
10	EKH-417107	2600	230	2	295	36	41	8.5			6	186		74	AS021
11	EKH-417354	2700	230	3	160	34	45	8.3			7	140		74	A2100146
12	EKH-417029	3000	230	2	325	33	28	8			5	125		58	SM489



fig.	GEV No.	P (W)	volt. (V)	HC	L (mm)	W (mm)	H (mm)	tube ø (mm)	ø (mm)	flange (mm)	TS ø (mm)	LTS (mm)	TS	HD (mm)	Ref. No.
13	EKH-417062	3000	230/400	3	238	32	26	8					1 1/4"		P073
14	EKH-417358	3300	230	2	230	38	38	8					1 1/4"		GRC102
15	EKH-417353	3500	230/400	3	295	34	45	8.3			7	210		74	A2100031
16	EKH-417446	4000	230	2	342	26	51	8						57	BF050



fig.	GEV No.	P (W)	volt. (V)	HC	L (mm)	W (mm)	H (mm)	tube ø (mm)	ø (mm)	flange (mm)	TS ø (mm)	LTS (mm)	TS	HD (mm)	Ref. No.
17	EKH-417202	4000	230	3	295	34	63	8.5			6.5	199		74	V583/2
17	EKH-417112	4500	230	3	390	35	70	8			6.5	200		74	V583/3
18	EKH-417352	4000	230/400	3	545	34	45	8.3			7	210		74	A2100120

heating elements


Italcrem


fig.	GEV No.	P (W)	volt. (V)	HC	L (mm)	W (mm)	H (mm)	tube ø (mm)	ø (mm)	flange (mm)	TS ø (mm)	LTS (mm)	TS	HD (mm)	Ref. No.
1	EKH-417116	1800	230	2	240	36	44	8.5			6	205		74	—
2	EKH-417001	2600	230	2	330	30	60	8.5			7	195		74	02212439

La Cimbali


fig.	GEV No.	P (W)	volt. (V)	HC	L (mm)	W (mm)	H (mm)	tube ø (mm)	ø (mm)	flange (mm)	TS ø (mm)	LTS (mm)	TS	HD (mm)	Ref. No.
1	EKH-417014	1300	230	1	185	40	18	8.5						59	442-501-005
2	EKH-417011	1800	230	3	170	34	35	8.5			7	170		59	421-601-010
3	EKH-417013	2850	230/400	3	320	27	35	8.5						59	489-553-020
4	EKH-420337	3990	230	3	300	31	25	6.3			7	210		59	802140217



fig.	GEV No.	P (W)	volt. (V)	HC	L (mm)	W (mm)	H (mm)	tube ø (mm)	ø (mm)	flange (mm)	TS ø (mm)	LTS (mm)	TS	HD (mm)	Ref. No.
5	EKH-417202	4000	230	3	295	34	63	8.5			6.5	199		74	911544010
6	EKH-419158	3750-4500	220-240	3	380	36	37	8.4			6	150		59	476-513-030

La Marzocco


fig.	GEV No.	P (W)	volt. (V)	HC	L (mm)	W (mm)	H (mm)	tube ø (mm)	ø (mm)	flange (mm)	TS ø (mm)	LTS (mm)	TS	HD (mm)	Ref. No.
1	EKH-417045	1800	230	1	135	36	39	8.5					1¼"		LR340/220B
2	EKH-417398	3000	220	1	390	31	31	10					1¼"		LR357/220B

La San Marco


fig.	GEV No.	P (W)	volt. (V)	HC	L (mm)	W (mm)	H (mm)	tube ø (mm)	ø (mm)	flange (mm)	TS ø (mm)	LTS (mm)	TS	HD (mm)	Ref. No.
1	EKH-417351	1750	230	1	135	41	64	8	41					60	108245
2	EKH-417185	2000	230	1	183	28	38	8			5	145		58	108414
3	EKH-417029	3000	230	2	325	33	28	8			5	125		58	108350
4	EKH-417028	3000	230	3	341	33	46	8.5			7	186		62	0796FS



fig.	GEV No.	P (W)	volt. (V)	HC	L (mm)	W (mm)	H (mm)	tube ø (mm)	ø (mm)	flange (mm)	TS ø (mm)	LTS (mm)	TS	HD (mm)	Ref. No.
5	EKH-417297	3500	230	3	370	38	62	8			5	140		61	108630

La-Rocca



1

fig.	GEV No.	P (W)	volt. (V)	HC	L (mm)	W (mm)	H (mm)	tube ø (mm)	ø (mm)	flange (mm)	TS ø (mm)	LTS (mm)	TS	HD (mm)	Ref. No.
1	EKH-417531	1700	240	1	130	40	40	10						52	10202

La-Spaziale



1

fig.	GEV No.	P (W)	volt. (V)	HC	L (mm)	W (mm)	H (mm)	tube ø (mm)	ø (mm)	flange (mm)	TS ø (mm)	LTS (mm)	TS	HD (mm)	Ref. No.
1	EKH-417038	2700	230	1			200	8	110				3/8"		—

Mairali



1

fig.	GEV No.	P (W)	volt. (V)	HC	L (mm)	W (mm)	H (mm)	tube ø (mm)	ø (mm)	flange (mm)	TS ø (mm)	LTS (mm)	TS	HD (mm)	Ref. No.
1	EKH-417116	1800	230	2	240	36	44	8.5			6	205		74	—
2	EKH-417109	3700	230	2	445	26	54	8			7	208		74	02212538

Marcfi



1

fig.	GEV No.	P (W)	volt. (V)	HC	L (mm)	W (mm)	H (mm)	tube ø (mm)	ø (mm)	flange (mm)	TS ø (mm)	LTS (mm)	TS	HD (mm)	Ref. No.
1	EKH-417072	3000	230	2	355	36	25							52	—

Melitta



1

fig.	GEV No.	P (W)	volt. (V)	HC	L (mm)	W (mm)	H (mm)	tube ø (mm)	ø (mm)	flange (mm)	TS ø (mm)	LTS (mm)	TS	HD (mm)	Ref. No.
1	EKH-417456	70	230	1	128	38	2								11624
2	EKH-417501	90	230	1			2		120						308397
3	EKH-417455	90	240				12		99						11533
4	EKH-417454	2000	230	1			63	8.5	93	50x26					15633
5	EKH-415778	3000	230	1	160	140	28	6.4					3/4"		212113




fig.	GEV No.	P (W)	volt. (V)	HC	L (mm)	W (mm)	H (mm)	tube ø (mm)	ø (mm)	flange (mm)	TS ø (mm)	LTS (mm)	TS	HD (mm)	Ref. No.
6	417461	3810	230	1	375	165		8.5		47x24					12134

N&W




fig.	GEV No.	P (W)	volt. (V)	HC	L (mm)	W (mm)	H (mm)	tube ø (mm)	ø (mm)	flange (mm)	TS ø (mm)	LTS (mm)	TS	HD (mm)	Ref. No.
1	417453	1000	220	1			62	6	55				M10x1		098645

NuovaSimonelli

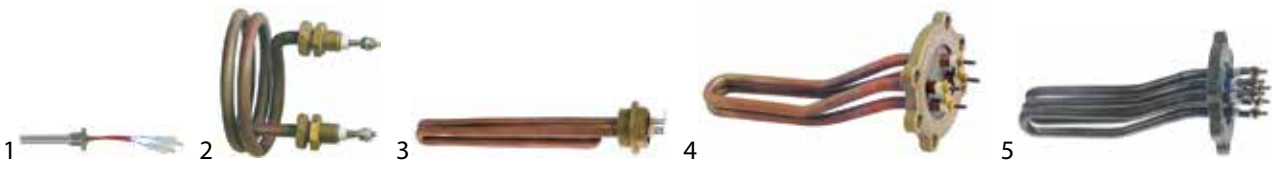


fig.	GEV No.	P (W)	volt. (V)	HC	L (mm)	W (mm)	H (mm)	tube ø (mm)	ø (mm)	flange (mm)	TS ø (mm)	LTS (mm)	TS	HD (mm)	Ref. No.
1	EKH-417194	600	230	1	74				10				3/8"		14100037
2	EKH-417132	1200	230	1			42	8	88				1/4"		14100008
3	EKH-417195	1200	230	1	155	22	22	8.5			7	160	1"		14100040
3	EKH-417190	1800	220	1	175	20	28	8.5					1"		14100029
4	EKH-417052	1800	230	2	180	31	46	8.5						54/76	14100084
5	EKH-417293	1800	230	3	155	36	50	8.5						77	14100084

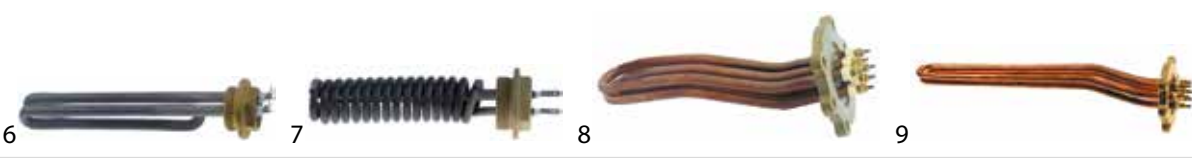


fig.	GEV No.	P (W)	volt. (V)	HC	L (mm)	W (mm)	H (mm)	tube ø (mm)	ø (mm)	flange (mm)	TS ø (mm)	LTS (mm)	TS	HD (mm)	Ref. No.
6	EKH-417490	2300	230	1	172	22	25	8.5					1"		14100054
7	EKH-417228	2600	230	1	155	52	52	6.3	35		7.5	150	1 1/4"		14100088
8	EKH-417131	2700	230	3	182	32	52	8						77	14100027
9	EKH-417053	3000	230	3	330	38	55	8.5						55	14100011




fig.	GEV No.	P (W)	volt. (V)	HC	L (mm)	W (mm)	H (mm)	tube ø (mm)	ø (mm)	flange (mm)	TS ø (mm)	LTS (mm)	TS	HD (mm)	Ref. No.
10	EKH-417184	4500	230	2	335	37	51	8.5						55	14100031

Palux



fig.	GEV No.	P (W)	volt. (V)	HC	L (mm)	W (mm)	H (mm)	tube ø (mm)	ø (mm)	flange (mm)	TS ø (mm)	LTS (mm)	TS	HD (mm)	Ref. No.
1	EKH-415439	2000	230	1	342	33	26	8.5						M12x1	378577
1	EKH-415437	3000	220	1	350	33	32	8.6						M12x1	378585
2	EKH-415440	3300	220	1	255	67	20	8.5						M12x1	372749

Pavoni



fig.	GEV No.	P (W)	volt. (V)	HC	L (mm)	W (mm)	H (mm)	tube ø (mm)	ø (mm)	flange (mm)	TS ø (mm)	LTS (mm)	TS	HD (mm)	Ref. No.
1	EKH-417385	920	230	1	50	59	96	6.5	59					80	331335
2	EKH-417045	1800	230	1	135	36	39	8.5					1¼"		—
3	EKH-417059	3000	230	3	223	30	67	8.5						52	—
4	EKH-417062	3000	230/400	3	238	32	26	8					1¼"		—



fig.	GEV No.	P (W)	volt. (V)	HC	L (mm)	W (mm)	H (mm)	tube ø (mm)	ø (mm)	flange (mm)	TS ø (mm)	LTS (mm)	TS	HD (mm)	Ref. No.
5	EKH-417382	2870/3130	230/240	3	235	32	33	8			6.5	140		51	2310003001

Project



fig.	GEV No.	P (W)	volt. (V)	HC	L (mm)	W (mm)	H (mm)	tube ø (mm)	ø (mm)	flange (mm)	TS ø (mm)	LTS (mm)	TS	HD (mm)	Ref. No.
1	EKH-417568	800	220	1	75	40									PTC02

QualityEspresso



fig.	GEV No.	P (W)	volt. (V)	HC	L (mm)	W (mm)	H (mm)	tube ø (mm)	ø (mm)	flange (mm)	TS ø (mm)	LTS (mm)	TS	HD (mm)	Ref. No.
1	EKH-417001	2600	230	2	330	30	60	8.5			7	195		74	02212439
2	EKH-417290	3000	230	2	250	28	65	8.3			7	210		74	08024804
3	EKH-417108	3500	230	2	380	30	50	8.5			7	190		74	08148002
4	EKH-417109	3700	230	2	445	26	54	8			7	208		74	02212538

Rancilio


fig.	GEV No.	P (W)	volt. (V)	HC	L (mm)	W (mm)	H (mm)	tube ø (mm)	ø (mm)	flange (mm)	TS ø (mm)	LTS (mm)	TS	HD (mm)	Ref. No.
1	EKH-417009	2100	230	3	220	29	50							62	36322022
1	EKH-417176	3000	230	3	215	42	50							62	33322028
2	EKH-417135	3900	230	3	391	35	51							63	33322039

Royal


fig.	GEV No.	P (W)	volt. (V)	HC	L (mm)	W (mm)	H (mm)	tube ø (mm)	ø (mm)	flange (mm)	TS ø (mm)	LTS (mm)	TS	HD (mm)	Ref. No.
1	EKH-417277	1300	220	1	97	26	26	6.5					1¼"		5050009
2	EKH-417273	2400	230	2	210	35	27	8.3			7	195		74	5050710
3	EKH-417275	2500	230	2	285	35	24	8.3			7	160	1¼"		5050205

Sanremo


fig.	GEV No.	P (W)	volt. (V)	HC	L (mm)	W (mm)	H (mm)	tube ø (mm)	ø (mm)	flange (mm)	TS ø (mm)	LTS (mm)	TS	HD (mm)	Ref. No.
1	EKH-417280	1000	220	1			60	6.3	50				M10x1		10455014
2	EKH-417378	2700	230	3	325	34	35	8.5			7	220	1¼"		10455052
2	EKH-417379	4500	230	3	325	35	35	8.5			7	220	1¼"		10455080

Solenry


fig.	GEV No.	P (W)	volt. (V)	HC	L (mm)	W (mm)	H (mm)	tube ø (mm)	ø (mm)	flange (mm)	TS ø (mm)	LTS (mm)	TS	HD (mm)	Ref. No.
1	EKH-417145	2000	230	1	328	25	37						1¼"		—

SV-Italia


fig.	GEV No.	P (W)	volt. (V)	HC	L (mm)	W (mm)	H (mm)	tube ø (mm)	ø (mm)	flange (mm)	TS ø (mm)	LTS (mm)	TS	HD (mm)	Ref. No.
1	EKH-417417	3000	230	2	343	34	62	6.3						57.5	SV2GR003

VFA-Express



fig.	GEV No.	P (W)	volt. (V)	HC	L (mm)	W (mm)	H (mm)	tube ø (mm)	ø (mm)	flange (mm)	TS ø (mm)	LTS (mm)	TS	HD (mm)	Ref. No.
1	EKH-417090	1450	230	1	132	36	40	6.3						74	521911/1

Vibiemme



fig.	GEV No.	P (W)	volt. (V)	HC	L (mm)	W (mm)	H (mm)	tube ø (mm)	ø (mm)	flange (mm)	TS ø (mm)	LTS (mm)	TS	HD (mm)	Ref. No.
1	EKH-417081	1350	230	1	140	22	23	8.5					1"		ELETRESD1422
2	EKH-417498	1800	230	1	140	26	26	8.5					1 1/4"		ELETRESSM1822
3	EKH-417030	1800	230	2	177	26	53	8.5						57	ELETRES1G1822
4	EKH-417150	2700	230	2	252	26	65							57	ELETRES2G2722



fig.	GEV No.	P (W)	volt. (V)	HC	L (mm)	W (mm)	H (mm)	tube ø (mm)	ø (mm)	flange (mm)	TS ø (mm)	LTS (mm)	TS	HD (mm)	Ref. No.
5	EKH-417446	4000	230	2	342	26	51	8						57	ELETRES2G4023
5	417439	5000	230	2	455	25	51							57	ELETRES3G5023

Visacrem



fig.	GEV No.	P (W)	volt. (V)	HC	L (mm)	W (mm)	H (mm)	tube ø (mm)	ø (mm)	flange (mm)	TS ø (mm)	LTS (mm)	TS	HD (mm)	Ref. No.
1	EKH-417116	1800	230	2	240	36	44	8.5			6	205		74	—
2	EKH-417109	3700	230	2	445	26	54	8			7	208		74	02212538
3	EKH-417110	5000	230	2	525	26	45	8.5			7	210		74	02212637

WEGA



fig.	GEV No.	P (W)	volt. (V)	HC	L (mm)	W (mm)	H (mm)	tube ø (mm)	ø (mm)	flange (mm)	TS ø (mm)	LTS (mm)	TS	HD (mm)	Ref. No.
1	EKH-417458	200	230		500	160	15	6.4							WY17022
2	EKH-417459	1300	230	1	107	26	26						1 1/4"		WY17202
3	EKH-417006	1300	230	1	110	27	30	6.4					1 1/4"		WY17201
4	EKH-417090	1450	230	1	132	36	40	6.3						74	—
5	EKH-417043	1800	230	3	175	35	30	8						74	W10451




fig.	GEV No.	P (W)	volt. (V)	HC	L (mm)	W (mm)	H (mm)	tube ø (mm)	ø (mm)	flange (mm)	TS ø (mm)	LTS (mm)	TS	HD (mm)	Ref. No.
6	EKH-417107	2600	230	2	295	36	41	8.5			6	186		74	17051
7	EKH-417154	2700	230	3	185	32	50	8						74	—
8	EKH-417155	3000	230	3	315	32	45	8						74	W05152
9	EKH-417000	3400	230	3	305	35	38	8.3			6	155		74	WY17059




fig.	GEV No.	P (W)	volt. (V)	HC	L (mm)	W (mm)	H (mm)	tube ø (mm)	ø (mm)	flange (mm)	TS ø (mm)	LTS (mm)	TS	HD (mm)	Ref. No.
10	EKH-417112	4500	230	3	390	35	70	8			6.5	200		74	—
11	EKH-419174	4000/4355	230/240	3	315	38	45	8.5			6	157		75	WY17057